

AQUA CREEK LIFT APPLICATION GUIDE
(How to determine which lift you need and where to locate it)

Aqua Creek Products Lift Selection Chart

| Aqua Creek Lift Model* | Suitable for use in: | | Pool/Spa Type | | Deck Types | | Weight Capacity | Overhead Clearance | Max Water Draft | Max Wall Height | Max Wall Thickness | Set Back Range |
|-------------------------------|----------------------|-------------|---------------|-----------|------------|--------|-----------------|--------------------|-----------------|-----------------|--------------------|----------------|
| | Commercial | Residential | Above Ground | In Ground | Concrete | Wood | | | | | | |
| Revolution Lift | Yes | Yes | Yes | Yes | Yes | No | 500 lbs | 8 ft | 10 inches* | 30 inches* | 10 Inches* | 10-40 inches |
| Pro Pool Lift | Yes | Yes | No | Yes | Yes | Yes ** | 400 lbs | N/A | 9 inches* | N/A | N/A | 6-14 inches* |
| Portable Pro Pool Lift | Yes | Yes | No | Yes | N/A | N/A | 400 lbs | N/A | 9 inches* | N/A | N/A | 6-12 inches |
| EZ Lift | No | Yes | Yes | Yes | Yes | Yes ** | 400 lbs | 7 ft | 26 inches* | 26 inches | 14 inches* | 6-20 inches* |
| Power EZ Lift | No | Yes | Yes | Yes | Yes | Yes ** | 400 lbs | 7 ft | 26 inches* | 26 inches | 14 inches* | 6-20 inches* |
| Liberty Lift | Yes | Yes | No | Yes | Yes | No | 450 lbs | N/A | 4 Inches | N/A | N/A | 3 inches |
| The Spa Lift | No | Yes | Yes | No | Yes | Yes ** | 400 lbs | 8 ft | N/A | 40 inches | 14 inches* | 0-2 inches* |
| Pro Spa 40 Lift | Yes | Yes | Yes | No | Yes | Yes ** | 400 lbs | 8 ft | N/A | 40 inches | 14 inches* | 0-2 inches* |
| Pro Spa 60 Lift | Yes | Yes | Yes | No | Yes | Yes ** | 400 lbs | 12 ft | N/A | 60 inches | 14 inches* | 0-2 inches* |

* All features and measurements are based on standard units. Options may be available for increased or decreased dimensions and capabilities. Please check with Aqua Creek Products for specific product option information.

** Requires the purchase of an additional anchor system.

N/A -Feature is not applicable or the lift is not designed for this application.

NOTE: Aqua Creek manufactures its standard lifts according to the most common pool and spa dimensions. If you have special needs or a unique application feel free to call us for customizations to standard units or even a completely custom unit!


General Installation Information

You will want to locate your lift in no more than 48 inches of water and no less than 40 inches of water for optimal performance and enjoyment.

You will want to have adequate deck space around the lift and a wheelchair accessible route leading up to the lift location that allows for safe transfers. The ADA requires a clear deck space on the side of the seat opposite the water. The space is measured from the seat. Clear space is required to be 36 inches wide minimum and 48 inches long minimum from a line located 12 inches behind the intersection of the seat and its back. The clear space is specified in relationship to the seat to allow unobstructed space for either side or diagonal transfer. The space must be clear and free of deck braces that can interfere with transfer. (See Figure 1) This is a good rule to follow for residential applications as well.

Most lifts are installed into concrete decks and require some core drilling of the deck in order to set the anchors. Your instruction manual will provide you the information you need in order to perform these tasks. Generally the minimum concrete requirements between expansion joints are that the concrete should be at least 6 inches thick, at least 4 feet wide and at least 6 feet in length; you can contact Aqua Creek for more specific information on concrete requirements. If your deck does not meet this requirement, then you may need to saw cut the deck and pour a new portion of deck that can support the load requirements. Most lifts can be adapted for wood deck applications with the purchase of a separate wood deck anchor system. Follow the instructions supplied with your wood deck anchor system closely for these types of installations to prevent injury to the user.

Many lifts offer options to allow them to fit most pool and spa applications. The lift selection chart is based on Aqua Creek Standard models and should provide you some assistance in choosing the correct lift for your particular application. Should you have any questions at all feel free to call us, we will be glad to help you determine which lift you need.

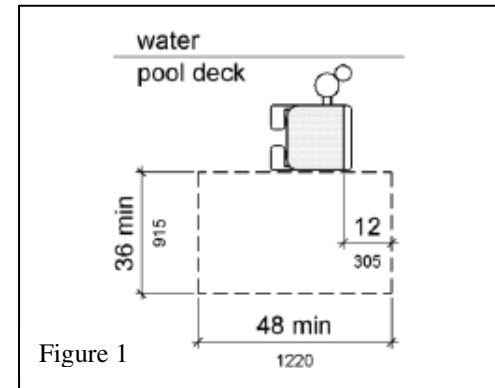

Thank you for choosing Aqua Creek Products – The Total Solution for Pool and Spa Access!

Aqua Creek Products LLC
3015 W Railroad St #8
Missoula, MT 59808
(888) 687-3552
www.aquacreek.com